

8-21-00

A

08/18/00
JC907 U.S. PTO

EXPRESS MAIL RECEIPT NO.: EK887660828US
DEPOSITED ON AUGUST 18, 2000

PATENT
Dkt. 23124

Preliminary Classification:
Proposed Class:
Subclass:

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Box Patent Application
Commissioner for Patents
Washington, D.C. 20231

08/18/00
09/641902
JC907 U.S. PTO

NEW APPLICATION TRANSMITTAL

Transmitted herewith for filing is the patent application of

Inventor(s): **Russell P. Slife; James R. Jenkins; Roger A. Jessen and Ronald D. Fowler**

For (title): **COMPUTER DIRECTED HEAD STACK ASSEMBLY INSTALLATION
SYSTEM**

1. Type of Application

This transmittal is for an original (nonprovisional) application.

2. Papers Enclosed

A. Required for filing date under 37 C.F.R. 1.53(b) (Regular) or 37 C.F.R. 1.153
(Design) Application

22 Pages of Specification
10 Pages of Claims
10 Sheets of Drawings-Formal

B. Other Papers Enclosed

3 Pages of Declaration
6 Pages of Power of Attorney
1 Page of Abstract

3. Additional Papers Enclosed

3 Pages of Information Disclosure Statement (37 C.F.R. 1.98), including Form PTO-1449 (PTO/SB/08A and 08B), with 10 references of cited art
Acknowledgment Postcard

4. Declaration or Oath

Enclosed and executed by inventors: Russell P. Slife, James R. Jenkins, Roger A. Jensen and Ronald D. Fowler

5. Inventorship Statement

The inventorship for all the claims in this application is the same.

6. Language

English

7. Assignment

An assignment of the invention to SEAGATE TECHNOLOGY LLC is attached. A separate FORM PTO 1595 is also attached.

8. Fee Calculation (37 C.F.R. Section 1.16)

Regular Application

CLAIMS AS FILED

Claims	Number Filed	Basic Fee Allowance	Number Extra	Rate	Basic Fee 37 CFR 1.16(a) \$690.00
Total Claims (37 CFR 1.16(c))	20	- 20 =	0 x	\$18.00	\$0.00
Independent Claims (37 CFR 1.16(b))	2	- 3 =	0 x	\$78.00	\$0.00
Multiple Dependent Claim(s), if any (37 CFR 1.16(d))			+	\$260.00	\$0.00

Filing Fee Calculation \$690.00

9. Fee Payment Being Made at This Time

Enclosed

Filing Fee	\$690.00
Recording assignment (\$40; 37 C.F.R. Section 1.21(h))	\$40.00
Total Fees Enclosed	\$730.00

10. Method of Payment of Fees

Two checks in the amounts of \$690.00 and \$40.00 are attached.

11. Authorization to Charge Additional Fees

The Commissioner is hereby authorized to charge the following additional fees by this paper and during the entire pendency of this application to Account No. 13-0110.

37 C.F.R. Section 1.16(a), (f) or (g) (filing fees)

37 C.F.R. Section 1.16(b), (c) or (d) (presentation of extra claims)

37 C.F.R. Section 1.16(e) (surcharge for filing the basic filing fee and/or declaration on a date later than the filing date of the application)

37 C.F.R. Section 1.17(a)(1)-(5) (extension fees pursuant to SECTION 1.136(a))

12. Instructions as to Overpayment

Refund.

**ADDED PAGES FOR NEW APPLICATION TRANSMITTAL WHERE BENEFIT OF
PRIOR U.S. APPLICATION CLAIMED**

13. Relate Back

A. 35 U.S.C. Section 119(e)

The nonprovisional application designated above claims the benefit of U.S. Provisional Application No.:

APPLICATION NO.


60/150,138

FILING DATE

August 20, 1999

14. Further Inventorship Statement Where Benefit of Prior Application(s) Claimed

- a. This application discloses and claims only subject matter disclosed in the prior application whose particulars are set out above and the inventors in this application are the same.



Bill D. McCarthy, Reg. No. 26,772
Randall K. McCarthy, Reg. No. 39,297
Daniel P. Dooley, Reg. No. 46,369
CROWE & DUNLEVY, P.C.
1800 Mid-America Tower
20 North Broadway
Oklahoma City, Oklahoma 73102
United States of America
405-235-7700 (*Telephone*)
405-239-6651 (*Facsimile*)

Crowe & Dunlevy

A PROFESSIONAL CORPORATION

ATTORNEYS AND COUNSELORS AT LAW

1800 MID-AMERICA TOWER

20 NORTH BROADWAY

OKLAHOMA CITY, OKLAHOMA 73102-8273

(405) 235-7700

FAX (405) 239-6651

www.crowedunlevy.com

TULSA

500 KENNEDY BUILDING

321 SOUTH BOSTON AVENUE

TULSA, OKLAHOMA 74103-3313

(918) 592-9800

FAX (918) 592-9801

RANDALL K. MCCARTHY

DIRECT LINE (405) 239-6691

DIRECT FAX (405) 272-5948

NORMAN

THE H/POINT OFFICE BUILDING

2500 SOUTH MCGEE, SUITE 140

NORMAN, OKLAHOMA 73072-6705

(405) 321-7317

FAX (405) 360-4002

AT&T MAIL crowedun/mccarr

INTERNET mccarr@crowedunlevy.com

X.400 /C=us/A=attmail/O=attmail/DDA ID

=crowedun/mccarr

August 18, 2000

Express Mail Receipt No. EK887660828US

Deposited on August 18, 2000

3-c875 U.S. PTO
09/641902
08/18/00

BOX ASSIGNMENTS

Commissioner for Patents

Washington, D.C. 20231

Re: U.S. Patent Application entitled COMPUTER DIRECTED HEAD STACK
ASSEMBLY INSTALLATION SYSTEM

Inventors: Russell P. Slife, James R. Jenkins, Roger A. Jessen and Ronald D.
Fowler

Filing Date: August 18, 2000

Our Docket: 23124

Sir:

Enclosed for recording is the Assignment for the following United States patent
application:

U.S. Patent Application entitled COMPUTER DIRECTED HEAD STACK
ASSEMBLY INSTALLATION SYSTEM

Inventors: Russell P. Slife, James R. Jenkins, Roger A. Jessen and Ronald D.
Fowler

Filing Date: August 18, 2000

Assignee: Seagate Technology LLC


Our Docket Number 23124

A Recordation Form Cover Sheet - Patents Only, Form PTO-1595, is provided for the
above documents. A check in the amount of \$40.00 is also enclosed to cover the recording fee.
Should additional fees be required, you are hereby authorized to charge same to Deposit Account
No. 13-0110.

BOX ASSIGNMENTS
Commissioner for Patents
August 18, 2000
Page 2

The enclosed documents are being sent by Express Mail Receipt No. EK887660828US
on August 18, 2000.

Respectfully submitted,



Daniel P. Dooley
Reg. No. 46,369

DPD/sm
Enclosures

PATENT APPLICATION
DOCKET NO. 23124

APPLICATION

Of

RUSSELL P. SLIFE, JAMES R. JENKINS,
ROGER A. JESSEN AND RONALD D. FOWLER

For

UNITED STATES LETTERS PATENT

On

COMPUTER DIRECTED HEAD STACK
ASSEMBLY INSTALLATION SYSTEM

Docket 23124
Sheets of Drawings: 10

Attorneys
Crowe & Dunlevy
1800 Mid-America Tower
20 N. Broadway
Oklahoma City, Oklahoma 73102-8273
Telephone: (405) 235-7700
Facsimile: (405) 239-6651

**COMPUTER DIRECTED HEAD STACK ASSEMBLY
INSTALLATION SYSTEM**

Related Applications

This application claims priority to United States Provisional
Application No. 60/150,138 filed August 20, 1999.

Field of the Invention

The present invention relates generally to the field of disc drive data storage
devices, and more particularly, but not by way of limitation, to a method for
directing the automated manufacture of a disc drive head-disc assembly.

Background

Modern hard disc drives are commonly used in a multitude of computer
environments, ranging from super computers through notebook computers, to store
large amounts of data in a form that can be made readily available to a user.
Typically, a disc drive comprises one or more magnetic discs that are rotated by a
spindle motor at a constant high speed. The surface of each disc is a data recording
surface divided into a series of generally concentric recording tracks radially spaced
across a band having an inner diameter and an outer diameter. The data tracks
extend around the disc and store data within the tracks on the disc surfaces in the
form of magnetic flux transitions. The flux transitions are induced by an array of
transducers, otherwise commonly called read/write heads. Typically, each data track
is divided into a number of data sectors that store fixed sized data blocks.

The read/write head includes an interactive element such as a magnetic
transducer, which senses the magnetic transitions on a selected data track to read the
data stored on the track. Alternatively, the read/write head transmits an electrical
signal that induces magnetic transitions on the selected data track to write data to the

track. As is known in the art, each read/write head is mounted to a rotary actuator arm and is selectively positionable by the actuator arm over a selected data track of the disc to either read data from or write data to the selected data track. The read/write head includes a slider assembly having an air-bearing surface that causes the read/write head to fly above the disc surface. The air bearing is developed as a result of load forces applied to the read/write head by a load arm interacting with air currents that are produced by rotation of the disc.

Typically, a plurality of open-center discs and open-centered spacer rings are alternately stacked on the hub of a spindle motor, followed by the attachment of a clamping to form a disc pack or disc stack. The hub, defining the core of the stack, serves to align the discs and spacer rings around a common centerline. Movement of the discs and spacer rings is typically constrained by a compressive load maintained by the clamping. The read/write heads mounted on a complementary stack of actuator arms, which compose an actuator assembly, commonly called an E-block, accesses the surfaces of the stacked discs of the disc pack. The E-block also generally includes read/write head wires which conduct electrical signals from the read/write heads to a flex circuit which, in turn, conducts the electrical signals to a printed circuit board assembly (PCB). When the E-block is merged with the disc pack into a base deck and a cover is attached to the base deck a head-disc assembly (HDA) is formed. For a general discussion of E-block assembly techniques, see U.S. Patent No. 5,404,636 entitled METHOD OF ASSEMBLING A DISC DRIVE ACTUATOR issued April 11, 1995 to Stefansky et al., assigned to the assignee of the present invention.

The head-disc assembly (HDA) of a disc drive is typically assembled in a clean room environment. The need for maintaining a clean room environment (free of contaminants of about 0.3 micron and larger) is to ensure the head-disc interface remains unencumbered and damage free. The slightest damage to the surface of a disc or read/write head can result in a catastrophic failure of the disc drive. The primary causes of catastrophic failure, particularly read/write head crashes (a non-recoverable, catastrophic failure of the disc drive), are generally characterized as contamination, exposure to mechanically induced shock, and non-shock induced damage. The source of non-shock induced damage is typically traced to the

assembly process, and generally stems from handling damage sustained by the disc drive during the assembly process.

Several factors that bear particularly on the problem of assembly process induced damage are the physical size of the disc drive, the spacing of the components, the recording densities sought to be achieved and the level of precision to be maintained during the assembly process. The high levels of precision required by the assembly process are necessary to attain the operational tolerances required by the disc drive. The rigorous operational tolerances are in response to market demands that have driven the need to decrease the physical size of disc drive while simultaneously increasing disc drive storage capacity and performance characteristics.

Demands on disc drive mechanical components and assembly procedures have become increasingly more critical in order to support capability and size in the face of these new market demands. Part-to-part variation in critical functional attributes in the magnitude of a micro-inch can result in disc drive failures. Additionally, as disc drive designs continue to decrease in size, smaller read/write heads, thinner substraights, longer and thinner actuator arms, and thinner gimbal assemblies will continue to be incorporated into the drives. This trend significantly increases the need to improve the assembly processes to protect the read/write heads and discs from damage resulting from incidental contact between mating components. The aforementioned factors resultantly increase the difficulty of assembling disc drives. As the assembly process becomes more difficult, the need to invent new tools, methods and control systems to deal with the emerging complexities presents unique problems in need of solutions.

Coupled with the size and performance improvement demands is the factor of further market driven requirements for ever increasing fault free performance. The progression of continually decreasing disc thickness and disc spacing, together with increasing track density and increasing numbers of discs in the disc pack, has resulted in a demand for tools, methods and control systems of ever increasing sophistication. A result of the growth in demand for sophisticated assembling equipment has been a decreasing number of assembly tasks involving direct operator intervention. Many of the tasks involved in modern assembly methods are beyond

the capability of operators to reliably and repeatedly perform, further driving the need for automation equipment and tools.

In addition to the difficulties faced in assembling modern disc drives of high capacity and complex, physical product performance requirements have dictated the need to develop new process technologies to ensure compliance with operating specifications. The primary factors driving more stringent demands on the mechanical components and the assembly process are the continually increasing areal densities and data transfer rates of the disc drives.

The continuing trend in the disc drive industry is to develop products with ever increasing areal densities, decreasing access times and increasing rotational speeds. The combination of these factors, place greater demands on the ability of modern servo systems to control the position of read/write heads relative to data tracks. The ability to assemble HDAs nominally free from the effects caused by unequal load forces on the read/write heads, disc pack imbalance or one of the components of runout, velocity and acceleration (commonly referred to as RVA) poses a significant challenge as track densities increase. The components of RVA are: disc runout (a measure of the motion of the disc along the longitudinal axis of the motor as it rotates); velocity (a measure of variations in linear speed of the disc pack across the surface of the disc); and acceleration (a measure of the relative flatness of the discs in the disc pack).

One cause of unequal load forces on the read/write heads stems from misalignment of the head stack assembly during assembly of the HDA. Misalignment of the head stack assembly causes the fly-height of the individual read/write heads to deviate from optimum, causing an increase in the distance between the disc the head for some surfaces and decreasing the distance for others. If the deviation is substantial, head/disc contact occurs that can lead to head crashes. For less severe deviations in fly heights, soft read errors often develop. If the soft errors are detected in the test process, the HDA is returned to the clean room for rework, exposing the HDA to handling damage. If the soft errors go undetected during the test process and develop during operation in the field, disc drive performance denigrates, write faults may be reported and reliability of the disc drive suffers. The ability to control the alignment of the head stack assembly derives from

the ability to precisely control the installation of the head stack assembly into the HDA.

By design, a disc drive typically has a discreet threshold level of resistance to withstand rotationally induced noise and instability, below which the servo system is not impaired. Also, a fixed range of load forces must be maintained on the read/write head to ensure proper fly height for data exchange. The operating performance of the disc drive servo system is affected by mechanical factors beyond the effects of mechanically induced read/write head oscillation from disc surface anomalies. Errors are traceable to disc pack imbalance and RVA noise sources. Even with improved approaches to the generation of position error signals in the disc drive servo system, the ability of the system to deal with such issues is finite. The limits of the servo system capability to reliably control the position of the read/write head relative to the data track must not be consumed by the noise present in the HDA resulting from the assembly process. Consumption of the available margin by the assembly process leaves no margin in the system to accommodate changes in the disc drive attributes over the life of the product. An inability to accommodate changes in the disc drive attributes leads to field failures and an overall loss in product reliability, a detrimental impact to product market position.

Thus, in general, there is a need for an improved approach to disc drive-assembling technology to minimize the potential of damage during assembly, to produce product that is design compliant and reliable, and to minimize mechanically induced system noise. More particularly, there is a need for a head stack assembly installation system controlling the installation of the head stack assembly into an HDA of a disc drive.

Summary of the Invention

The present invention is directed to a computer directed head stack assembly installation system with an installation software program having installation software program steps stored on recordable media directing the controlling a sequence of head stack installation assembly steps executed by a head stack assembly installation station installing a head stack assembly into a basedeck assembly forming a head disc assembly of a disc drive. The installation software

program directs a robotic assembly in a sequence of assembly steps directing the robotic assembly to pick and place the head stack assembly into the basedeck. During the placement operation, the installation software program monitors compliance of the placement operation to with respect to mechanical resistance encountered by the head stack assembly engaging the basedeck. The mechanical resistance is checked for performance characteristics against a dynamic force threshold F determined by the equation $[F = (f(p) \pm x)]$ and against the dynamic slope V determined by the equation $[V = (f_n - f_{n-1}) / (p_n - p_{n-1})]$. Upon successful installation of the head stack assembly into the basedeck forming the head disc assembly, the head disc assembly is released from the head stack assembly installation station.

These and other features and advantages which characterize the present invention will be apparent from a reading of the following detailed description and a review of the associated drawings.

Brief Description of the Drawings

FIG. 1 is a partially cutaway top view of a disc drive of the type assembled by the head stack assembly installation system of the present invention.

FIG. 2 is a partially cutaway top view of a basedeck assembly for the disc drive of FIG. 1.

FIG. 3 is an elevational view of the flex connector body with attached flex circuit and actuator assembly serial number for the disc drive of FIG. 1.

FIG. 4 is a partial cutaway elevational and partial cross-sectional view of the disc drive of FIG. 1.

FIG. 5 is a plan view of the actuator assembly of the disc drive of FIG. 1.

FIG. 6 is a partial cutaway elevational view of the actuator assembly of the disc drive of FIG. 1.

FIG. 7 is a partial cutaway perspective view of the head stack assembly installation system of the present invention.

FIG. 8 is a perspective view of an end effector assembly of the head stack assembly installation system of FIG. 7.

FIG. 9 is a cross-sectional, partial cutaway view of radially disposed positionable gripper sections of the end effector of FIG. 8.

FIG. 10 is a flow chart of system hardware communication for the head stack assembly installation system of FIG. 7.

FIG. 11 is a flow chart for logic of main process steps of an installation software program of the head stack assembly installation system of FIG. 7.

FIG. 12 is a flow chart for logic of head stack assembly installation process steps of the installation software program of the head stack assembly installation system of FIG. 7.

FIG. 13 is a flow chart for logic of head stack assembly installation analysis process steps of the installation software program of the head stack assembly installation system of FIG. 7.

FIG. 14 is a diagram showing an a family of empirically derived mechanical resistance thresholds.

Detailed Description

Referring to the drawings in general, and more particularly to FIG. 1, shown therein is a top view of a disc drive 100 constructed in accordance with the present invention. The disc drive 100 includes a basedeck 102 that has several fastener receptacles 104, the basedeck 102 supporting various disc drive components, and a top cover 106 (shown in part), with several mounting apertures (not separately shown), secured to the basedeck 102 by top cover fasteners 108. The installed top cover 106 together with the basedeck 102 provides a sealed internal environment for the disc drive 100. Numerous details of and variations for the construction of the disc drive 100 are not included in the following description as such are well known to those skilled in the art and are believed to be unnecessary for the purpose of describing the present invention.

Mounted to the basedeck 102 is a ramp load snubber assembly 110 secured to the basedeck 102 by a fastener 112, and a spindle motor 114 with a top cover attachment aperture 116. The spindle motor 114 supports several discs 118 for rotation at a constant high speed, the discs 118 mounted on a spindle motor hub 120 that are secured by a clampring 122 with clampring fasteners 124. In addition to

providing support for the stacked discs 118, the spindle motor hub 120 also provides a timing mark 126 used during the assembly process to reference the angular location of a source of rotational imbalance. Adjacent the discs 118 is an actuator assembly 128 (also referred to as an "E-block" or a head stack assembly (HSA)) which pivots about a bearing assembly 130 in a rotary fashion. The bearing assembly supports a beveled pick and place member 132 that serves as a tooling grip during assembly operations. The HSA 128 includes actuator arms 134 (only one shown) that support load arms 136. Each load arm 136 in turn supports read/write heads 138, with each of the read/write heads 138 corresponding to a surface of one of the discs 118. As mentioned, each of the discs 118 has a data recording surface divided into concentric circular data tracks 140 (only one shown), and the read/write heads 138 are positionably located over data tracks to read data from, or write data to, the tracks.

The HSA 128 is controllably positioned by a voice coil motor assembly (VCM) 142, comprising an actuator coil 144 immersed in the magnetic field generated by a magnet assembly 146. A magnetically permeable flux path is provided by a steel plate 148 (also called a top pole piece) mounted above the actuator coil 144 to complete the magnetic circuit of the VCM 142.

When controlled DC current is passed through the actuator coil 144, an electromagnetic field is setup, which interacts with the magnetic circuit of the VCM 142 to cause the actuator coil 144 to move relative to the magnet assembly 146 in accordance with the well-known Lorentz relationship. As the actuator coil 144 moves, the HSA 128 pivots about the bearing assembly 130, causing the heads 138 to move over the surfaces of the discs 118 thereby allowing the heads 138 to interact with the data tracks 140 of the discs 118. When the disc drive 100 is turned off, the VCM 142 parks the HSA 128 on the ramp load snubber assembly 110 to avoid shock induced contact between the read/write heads 138 and the discs 118.

To provide the requisite electrical conduction paths between the read/write heads 138 and disc drive read/write circuitry (not shown), read/write head wires (not shown) are affixed to a read/write flex circuit 150. Next the read/write flex 150 is routed from the load arms 136 along the actuator arms 134 and into a flex circuit containment channel 152 and on to a flex connector body 154. The flex connector

body 154 supports the flex circuit 150 during passage of the read/write flex circuit 150 through the basedeck 102 and into electrical communication a disc drive printed circuit board assembly (PCBA) (not shown) mounted to the underside of the basedeck 102. The flex circuit containment channel 152 also supports read/write
 5 signal circuitry 156 used to condition read/write signals passed between the read/write circuitry (not shown) and the read/write heads 138. The disc drive PCBA provides the disc drive read/write circuitry, which controls the operation of the heads 138, as well as other interface and control circuitry for the disc drive 100.

To maintain the sealed internal environment for the disc drive 100, a seal
 10 gasket 158 is molded on to the top cover 106. Top cover 106 has a multitude of gasket attachment apertures 160 through, which gasket material flows during the gasket molding process. A continuum of symmetrically formed gasket material is disposed on both the top and bottom surfaces of the top cover 106 and injected
 15 through the apertures 160. During the cure process, the gasket material injected into the gasket attachment apertures 160 bonds the portion of the seal gasket adjacent the top surface of the top cover 106 to the portion of the seal gasket adjacent the bottom portion of the top cover 106, thereby sealing the gasket attachment apertures 160 and forming the seal gasket 158. A gasket material found to be useful for this
 20 application is "Fluorel" by the 3M Company, and more specifically, 3M "Fluorel", FE- 5621Q.

The disc drive 100 has two primary assemblies, the PCBA (not shown) and a
 head disc assembly (HDA) 162 attached to the PCBA. The HDA 162 typically
 contains the mechanically active assemblies and components of the disc drive 100.
 Typically included within the HDA 162 are the HSA 128, the VCM 142 and a disc
 25 stack 164 sustained within the sealed environment created when the top cover 106 supporting the seal gasket 158 is secured to the basedeck 102 by fasteners 108. The disc stack 164 is formed by stacking discs 118, interleaved with spacer rings (not
 shown), on the spindle hub 120 of the spindle motor 114 and securing the stack with
 the clamping 122 and fasteners 124.

30 During operation of the disc drive 100, spinning discs 118 generate airflow consistent with the direction of rotation of the spinning discs 118. To reduce chances of a catastrophic failure of the disc drive 100 caused by particulate

contamination internal to the HDA 162, an air filter 166 is provided internal to the HDA 162 to trap airborne particulate either present following assembly or generated during operation of the disc drive 100.

FIG. 2 shows a basedeck assembly 168 to include the basedeck 102, the disc pack assembly 168, the air filter 166, a bottom pole piece 170 supporting a rare earth magnet 172 and a head stack assembly post 174 supporting a removably attached tolerance ring 176. The bottom pole piece 170, with the rare earth magnet 172, together with the top pole pieces 148, supporting a second rare earth magnet (not shown), form the magnet assembly 146 and the actuator coil 144 collectively form the VCM 142. The basedeck assembly 168 together with an installed HSA 128, magnet assembly 146 and top cover 106 combined to form the HDA 162 of FIG. 1.

FIG. 3 shows the flex connector body 154 with the attached flex circuit 150 supporting a machine-readable head stack assembly serial number 178. In a preferred embodiment machine-readable head stack assembly serial number 178 is a barcode but could also be characters capable of being optically recognized using optical character recognition software (OCR) or other comparable coding methodologies. The serial number 178 represents the physical characteristics for a particular HSA 128 that includes information such as the number and type of read/write heads 138 the HSA 128 contains, the type of bearing assembly 130 or the type of actuator coil 144 supported by the HSA 128.

FIG. 4 shows the disc drive 100 with a machine-readable head disc assembly serial number 180. Also shown by FIG. 4 is the mechanical interface between the bearing assembly 130 of the HSA 128 and the tolerance ring 176 removably attached to the head stack assembly post 172. The bearing assembly 130 includes the beveled pick and place member 132, and an inner race 182 separated by a bearing 184 from an outer race 186. During installation of the HSA 128 into the basedeck assembly 168 the inner race 182 of the bearing assembly 130 forcefully engages the tolerance ring 176 as the HSA 128 is pressed onto the tolerance ring 176 through application of a compressive load on the HSA 128.

FIG. 5 shows a tooling hole 188 provided in the actuator arms 134 to supporting the load arms 136. Typically, the load arms 136 are affixed to the actuator arms 134 through a process referred to as swaging. The swaging process

normally involves alignment of the load arms 136 with the actuator arms 134 and passage of a swage tool through the tooling hole 188. A tooling hole 190 is provided to facilitate alignment and containment of an actuator body 192 during assembly of the HSA 128, including the swaging process.

5 Actuator coil support arms 194 support the actuator coil 144 of the HSA 128 and serve as reference surfaces, along with tooling hole 190, for alignment of the HSA 128 in preparation for installation of the HSA 128 into head disc assembly 162. Additionally, FIG. 5 shows actuator coil leads 196 electrically communicating with the read/write flex circuit 150, the actuator coil leads 196 conduct current from
10 the read/write flex circuit 150 to the actuator coil 144, facilitating operation of the VCM 142.

To initiate the process of installing the HSA 128 onto the tolerance ring 176, an operator completes a series of inspection and preparation steps. The operator first checks the flex connections (not separately shown) and the bearing assembly 130 to
15 assure the HSA 128 is intact. Next the operator manually removes a shipping constraint (not shown), used to protect the HSA 128 during shipment, and adjusts the head stack assembly installation comb 198 to complete the preparation and inspection steps.

FIG. 6 shows the relationship between the various members and components
20 of the HSA 128. The majority of mass of the HSA 128 is concentrated around the axis of rotation of the bearing assembly 130 and is made up by the actuator body 192 and the bearing assembly 130. The actuator body 192 supports the actuator coil support arms 194, the actuator arms 134 and bearing assembly 130. The beveled pick and place member 132 is supported by the bearing assembly 130 and protrudes
25 about the top plain of the actuator body 192. The beveled pick and place member 132 provides a grip for handling the HSA 128 during installation of the HSA 128 into the basedeck assembly 168 of the HDA 162 of the disc drive 100.

FIG. 7 shows a head stack assembly installation system 200 with a frame 202 supporting a head stack assembly installation tool 204 and a computer 206. For a
30 preferred embodiment, the computer 206 is shown adjacent the head stack assembly installation tool 204 and supported by the frame 202. However, the head stack assembly installation tool 204 and the computer 206 need not be proximately

located, one to the other. Electronic communication between the head stack assembly installation tool 204 and the computer 206 is sufficient to operate the head stack assembly installation tool 204 during installation of the HSA 128 into the HDA 162.

5 The computer 206 is a host for an installation software program (not shown) that has installation software program steps. The computer 206 is used to calculate position and force data from position and force parameter measurements gathered by the head stack assembly installation tool 204 during the process of installing the actuator assembly 128 into the basedeck assembly 168 of the HDA 162. The installation software program directs and controls process steps executed by the head stack assembly installation tool 204, based on the position and force data calculated by the computer 206 from the position and force parameter measurements gathered by the head stack assembly installation tool 204.

10 The head stack installation tool 204 has a main plate 208 that provides a nesting position 210, an installation position 212 and a robotic assembly 214. The nesting position 210 provides a tooling pin 216 that communicates with the tooling hole 190 of the HSA 128; a connector nest 218, which cradles and aligns the flex connector body 154 of the HSA 128 with the actuator body 192 for installation of the HSA 128 into the HDA 162; and head stack assembly alignment pins 220 that interface with the actuator coil support arms 194 to maintain the HSA 128 in a predetermined position prior to installation of the HSA 128 into the basedeck assembly 168. The installation position 212 aligns the basedeck assembly 168 of the HDA 162 for installation of the HSA 128 into the basedeck assembly 168. Adjacent the installation position 212 is a lift and locate assembly 222 that lifts the basedeck assembly 168 from a conveyor (not shown) and locates the basedeck assembly 168 within the installation position 212. Additionally, the main plate 208 supports a head stack assembly scanner head 224 adjacent the nesting position 210 to read the machine readable head stack assembly serial number 178; a head disc assembly scanner head 226 adjacent the installation position 212 to read the machine readable head disc assembly serial number 180; a head stack assembly present sensor 228 adjacent the head stack assembly alignment pins 220 to detect the presence of HSA 128 in the nesting position 210; and a head disc assembly present sensor 230

adjacent the installation position 212 to detect the presence of the basedeck assembly 168 within the installation position 212.

The robotic assembly 214 has an end effector assembly 232 supported by a vertical slide assembly 234, which in turn is supported by a horizontal slide assembly 236 that is directly supported by the main plate 208. The position of the vertical slide assembly 234 during the operation of the head stack assembly installation system 200 is reported to the computer 206 by a vertical slide digital sensor 238 located adjacent the vertical slide 234. The position of the horizontal slide assembly 236, during the operation of the head stack assembly installation system 200, is reported to the computer 206 by a horizontal slide digital sensor 240 positioned adjacent the horizontal slide 236. The end effector assembly 232 uses the beveled pick and place member 132 of the HSA 128 to grip the HSA 128 for installation onto the tolerance ring 176. The end effector assembly 232 also has a pair of opposing positionable flex connector grippers 242 configured to communicate with the flex connector body 154. A pair of opposing positionable flex connector grippers 242 maintain alignment of the flex connector body 154 in relation to the actuator body 192 while the robotic assembly 214 is pressing the HSA 128 onto the tolerance ring 176 during the process of installing the HSA 128 into the basedeck assembly 168 of the HDA 162. A pneumatic cylinder housing 244 supports the pair of opposing positionable flex connector grippers 242 as well as supporting a pneumatic cylinder (not shown) used to operate the pair of opposing positionable flex connector grippers 242.

As shown in FIG. 7, a communication interface electronics assembly 246 is mounted internal to the computer 206. However, like the computer 206 itself, the communication interface electronics assembly 246 need not be proximately located to the computer 206, but rather, electronic communication between the communication interface electronics assembly 246 and the computer 206 is sufficient to operate the head stack assembly installation tool 204 during installation of the HSA 128 into the HDA 162. The communication interface electronics assembly 246 cooperates with a measurement assembly 247 that includes a radial displacement potentiometer 248, a linear variable differential transformer 250 (LVDT), and a load cell 252. The radial displacement potentiometer 248 is

supported by the end effector assembly 232 and electronically communicates with the communication interface electronics assembly 246 during the process of installing the HSA 128 into the basedeck assembly 168. The radial displacement potentiometer 248 measures position parameters of the gripping action of the end effector assembly 232 during installation process, and reports the measurements to the computer 206 through the communications interface electronics assembly 246. The LVDT 250 is supported by the vertical slide assembly 234 and electronically communicates with the communication interface electronics assembly 246 during the installation process. The LVDT 250 measures parameters of vertical distance traveled by the vertical slide 234 relative to the head stack assembly post 174 and reports the measured parameters to the computer 206. The load cell 252 is supported by the end effector assembly 232 and electronically communicates with the communication interface electronics assembly 246 during the HSA 128 to HDA 162 installation process. The load cell 252 measures parameters of mechanical resistance between the tolerance ring 176 and HSA 128, while the HSA 128 is being pressed onto the tolerance ring 176 to install the HSA 128 into the HDA 162.

FIG. 8 shows a gripper 254 of the end effector 232. Included in the gripper 254 is a radially disposed positionable gripper sections 258 linked to operate in unison and attached to a gripper housing 260. Each gripper section 258 supports a gripper finger 262 that is shaped to conform to the slope of the external surface of the beveled pick and place member 132. Each of the radially disposed positionable gripper sections 258 is coupled to the potentiometer 248 by a potentiometer coupling arm 264.

A push pad (also referred to as a “centering post”) 266 is attached to the gripper housing 260 and circumvented by the radially disposed positionable gripper sections 258. The radially disposed positionable gripper sections 258 move toward the push pad 266 contacting beveled pick and place member 132 to align the HSA 128 to the end effector assembly 232. Alignment of the HSA 128 to the end effector assembly 232 includes alignment of the top inner race 182 to the push pad 266. During the installation process the gripper fingers 262 remain in contact with the beveled pick and place member 132 until contact is established between the HSA 128 and the head stack assembly post 174. Upon measurement of initial contact

between the HSA 128 and the HDA 162, and reporting of that measured contact to the computer 206 by the load cell 252, the radially disposed positionable gripper sections 258 disengage contact with the beveled pick and place member 132. The push pad 266 remains in contact with the inner race of the bearing assembly 130 to transfer the compressive load delivered by the end effector assembly 232 to the HSA 128 during the process of pressing the HSA 128 onto the tolerance ring 176 of the HDA 162. Retracting the radially disposed positionable gripper sections 258 from contact with the beveled pick and place member 132 during the process of pressing the HSA 128 into position reduces the chances of the bearing 184 being damaged during installation process.

FIG. 9 shows the interaction between the gripper fingers 262, the push pad 266 and the beveled pick and place member 132. The gripper fingers 262 provide a slope surface 268 that conforms to the slope of the outer surface of the beveled pick and place member 132 while the push pad 266 provides a shouldered outer diameter 270 that is inserted into the inner race of the pick and place member 132. When activated to engage the HSA 128, the radially disposed positionable gripper sections 258 contact the outer surface of the bevel pick and place member 132 and align the HSA 128 to the end effector assembly 232 by positioning the inner surface of the pick and place member 232 into contact with the outer diameter 270 of the push pad 266.

FIG. 10 shows a central processing unit 272 (CPU) electronically communicating with recordable media 274. The recordable media 274 holds an installation software program (not separately shown) that has installation software program steps to carry out the assembly herein described. The term electronically communicating or in electronic communication does not necessarily mean that the two devices engaging in the communication are physically connected. The term includes devices that are physically connected and devices that are electronically connected via networking links such as infrared communication, radio-frequency communication or through the internet via satellite communication. For example, the recordable media 274 may located in one country, for example the United States, and the CPU 272 could be located in a different country, for example Ireland. The two devices, the CPU 272 and the recordable media 274, are each elements of the

head stack assembly installation system 200, dependent on each other for the functioning of the head stack assembly installation system 200, but neither is in direct physical contact with the other. They are however, linked, one to the other, electronically as portions of the head stack assembly installation station 200. FIG. 5 10 also shows the central processing unit 272 in electronic communication with a volatile memory 276 (also referred to herewithin as random access memory or RAM), a head stack assembly serial number data base 278 and a head disc assembly serial number data base 280.

The central processing unit 272 electronically communicates with the 10 recordable media 274 to upload the installation software program into the RAM 276 prior to execution of the installation process. During the installation process the installation software operates out of the RAM 276. In addition to containing an active version of the installation software program the RAM 276 also temporarily stores information communicated to the computer 206 from the communication 15 interface electronics assembly 246. The stored information includes a head stack present signal (not shown), detected by the head stack digital sensor 228, a head disc present signal (not shown), detected by the head disc assembly present digital sensor 230, a value (not shown) representing the head stack assembly serial number 178, provided by the head stack assembly scanner head 224 and a value (not shown) 20 presenting the head disc assembly serial number 180, provided by the head disc assembly scanner head 226. During operation of the head stack assembly installation system 200 additional data regarding position and force parameters encountered by the HSA 128 during the installation process as well as position data for the radially disposed positionable gripper sections 258, the vertical slide 25 assembly 234 and the horizontal slide assembly 236 are gathered and written to the RAM 276 on a real-time basis. The position of the horizontal slide assembly 236 is monitored and reported to the communication interface electronics 246 by the linear horizontal slide digital sensor 240, the position of the vertical slide assembly 234 is monitored and reported to the communication interface electronics 246 by the linear 30 vertical slide digital sensor 238, while position data for the gripper sections 258 is continually monitored by the radial displacement potentiometer 248. The position and force parameter measurements encountered by the HSA 128 while being pressed

onto the tolerance ring 176 are made and supplied to the RAM 267 by the linear variable differential transformer 250 and the load cell 252 respectively.

Two additional elements of the head stack installation system 200 are shown by FIG. 10. In electronic communication with the CPU 272 are the HSA serial number data base 278 and the HDA serial number data base 280, the HSA serial number data base 278 containing the physical characteristics of each HSA 128 available for installation into each HDA 164, while the HDA serial number data base 280 contains the physical characteristics of each HDA 164 available for receipt of the HSA 128. Prior to joining each available HSA 128 with each available HDA 164, the installation software program instructs the CPU 272 to read the serial number 178 of the HSA 128 from RAM 276, query the HSA serial number data base 278 and retrieve the physical characteristics information contained within the HSA serial number data base 278 for the HSA 128 serial number read from the RAM 276. The installation software program then instructs the CPU 272 to read the serial number 180 from RAM 276, query the HDA serial number data base 280 and retrieve the physical characteristics information contained within the HDA serial number data base 280 for the HDA 164 serial number read from the RAM 276. The software installation program then instructs the CPU 272 to compare the physical characteristics of the HDA 164 and the HSA 128 to one another, to ensure compatibility prior to proceeding with the installation of the HSA 128 into the HDA 164.

FIG. 11 shows a main process decision flow 300 utilized by the installation software program to grip the HSA 128 in preparation for installation of the HSA 128 into the HDA 164 of the disc drive 100. Once a start step 302, of the installation software program steps is initialized, three decision steps follow. The first decision step, HDA in position 304, verify the presence of the HDA 164 within the installation position 212 of the main plate 208. The second decision step, HSA positioned in the nest 306, verifies the presence of HSA 128 in the nesting position 212 of the main plate 208 and the third decision step, HSA serial number entered 308, verifies the presence of the serial number 178 within the RAM 276.

The main process decision flow 300 shows the installation software program instructs the robotic assembly 214 to grip the HSA 128 and proceed to predefined process steps install HSA decision flow 320 (of FIG. 12), provided responses of the

three decision steps are affirmative along with an affirmative response from a decision step HSA and HDA compatible 310. In addition to the specifically identified decision steps, the main process decision flow 300 shows the decision loops entered into by the installation software program if a non affirmative response is encountered from one of the specifically identified decision steps. The software installation program remains in the decision loop until the installation software program, from that decision loop, receives an affirmative response.

FIG. 12 shows the install HSA decision flow 320 of the installation software program utilized by the installation software program to engage the tolerance ring 176 with the HSA 128. A start step 322 is the first installation software program step of the install HSA decision flow 320. There are two primary decision steps involved in the install HSA decision flow 320. The first, a HSA engaged post 324, initiates step 326 upon successful engagement of the head stack assembly post 174 with the HSA 128. Installation software program step 326 directs the actions of; releasing the radially disposed positionable gripper sections 258 from contact with the beveled pick and place member 132, applying a compressive load on the HSA 128 with the robotic assembly 214, and collecting force and distance parameters from the load cell 252 and the LVDT 250 respectively. Upon successful completion of the second decision step, slide stopped moving 328, the installation software program initiates step 330, an action of raising the vertical slide 234 to discontinue application of the compressive load on the HSA 128 and to proceed to an analyze force and position data - decision flow 340 (of FIG. 13), another predefined sequence of process steps of the installation software program.

The install HSA decision flow 320 shows the decision loops entered into by the installation software program should a non affirmative response be a result of one of the decision steps. The software installation program remains in a decision loop until the installation software program receives, from either of the decision steps 324 or 328, an affirmative response. However, should the software installation program receive an affirmative response from a slide not moving 332 decision step, the installation software program directs the robotic assembly 214 to return the HSA 128 to the nest position 210 and displays a message on a display 334 for the operator to resolve the conflict and restart the process at main decision flow 300.

FIG. 13 shows the analyze force and position data - decision flow 340 of the installation software program utilized by the installation software program to measure and analyze forces and positions encountered by the HSA 128 while engaging the tolerance ring 176, as the robotic assembly presses the HSA 128 into the basedeck assembly 168. A start step 342 is the first installation software program step of the analyze force and position data - decision flow 340. The software installation program incorporates a force to distance ratio equation 344 to monitor installation of the HSA 128 onto the tolerance ring. During the installation process, process parameter measurements representing force and distance are gathered by the head stack installation tool 204 (of FIG. 7) and electronically communicated to the computer 206 (of figure 7). The computer 206 manipulates the measurements by converting the measurements into values and substituting those values into equation 344. The resulting calculated value, a slope, is compared to predetermined value dynamic slope V of decision step 348.

Turning to FIG. 14, the predetermined value V is empirically derived for forces typically encountered by the HSA 128 while being pressed onto the tolerance ring 176 at specific increments of distance encountered by the HSA 128 while traveled along the tolerance ring 176 and found to have a maximum value of 600, 358. The software also monitors mechanical resistance encounter during the process at time intervals of about every 50 milliseconds over the distance traveled by the HSA 128 while traveled along the tolerance ring 176. Empirically gathered mechanical resistance data yielded a mechanical resistance as a function of position ($f(p)$) curve 360. The mechanical resistance as a function of position curve 360 was arrived at through normal curve fitting techniques, relating the mechanical resistance encountered by the HSA 128 while being pressed onto the tolerance ring 176 to a point representing the distance covered by the head stack assembly at the point in time the mechanical resistance was encountered. A tolerance of about plus and minus 5% of the mechanical resistance encountered by the HSA 128 in any region of the tolerance ring 176 was elected and applied to the force curve resulting in a family of values representing dynamic force thresholds 362 against which actual measured process data can be dynamically compared. Forces encountered that fall

outside the dynamic, either insufficient or excessive, trigger the head stack assembly installation station to abort the process.

Returning to FIG. 13, the equation ($F = f(p) \pm x$) and $slop < V$ of 348 is interpreted to mean; should the force (F) measured as encountered by the HSA 128 at a position (p) while being pressed onto the tolerance ring 176 fall outside the empirically derived force as a function of position ($f(p)$) curve, plus or minus (x), about 5% of the force empirically found to be encountered at position (p) along the tolerance ring 176 during the mating process, the process will be aborted. And, should the force (F) measured as encountered by the HSA 128 at a position (p) while being pressed onto the tolerance ring 176 fall within the empirically derived mechanical resistance as a function of position ($f(p)$) curve 360 (of FIG. 14), plus or minus (x), about 5% of the mechanical resistance empirically found to be encountered at position (p) along the tolerance ring 176 during the mating process, but the $slop$ exceeds a predetermined value, empirically found to be about 600 the process will be aborted. Or, if the resultant calculated value falls outside the predetermined value V , the installation software program instructs the head stack installation tool 204 to abort the process, return the HSA 128 to the nest position 210 (of FIG. 7), and display a message on the display 334 reporting the status of the process and instructing the operator to remove the HSA 128 from the nest position 112, place the next HSA 128 into the nest position 112 and restart the process at process step 300. However, typically the software installation program remains in decision loops until the installation software program receives, from either of the installation software program steps 346 or 348, an affirmative response.

Upon receipt of an affirmative response from either installation software program steps 346 or 348, the installation software program proceeds to evaluate a course of action to be followed by the head stack installation tool 204, based on decision steps represented by installation software program steps 350, 352, 354 and 356. In each of the four installation software program steps 350, 352, 354 and 356 the installation software program checks process end points for specific values of force or distance encountered by the HSA 128 during the installation process. If the process end point values for the amount of force encountered by the HSA 128 is less than 11.34 kilograms, but greater than 0.363 kilograms, and the distance traveled by

the HSA 128 after encountering the head stack assembly post174 (of FIG. 4) is greater than Z minus 0.0254 centimeters, but less than Z plus 0.0254 centimeters (where Z is typically between 1.203 centimeters and 3.094 centimeters), the head stack installation tool 204 has successfully installed the HSA 128 into the HDA 162 (of FIG. 1). If the process end point values for the amount of force encountered by the HSA 128 or the distance traveled by the HSA 128 after encountering the head stack assembly post174 falls outside those parameters, the installation software program instructs the head stack installation tool 204 to abort the installation process attempt, directs the robotic assembly 214 to return the HSA 128 to the nest position 210 and displays a message on a display 334 for the operator to resolve the conflict and restart the process at main decision flow 300.

In accordance with a preferred embodiment, the present invention provides a method installing a head stack assembly into a basedeck assembly to form a head disc assembly of a disc drive. A method employs a head stack assembly installation system (such as 200) with a head stack installation tool (such as 204) electronically communicating with a computer (such as 206) that has an active installation software program directing and controlling process steps enacted by head stack installation tool to install a head stack assembly (such as 128) into a head disc assembly of a disc drive (such as 100). The head stack installation tool provides a nesting position (such as 210) for aligning in staging head stack assembly prior to installation into the head disc assembly, an installation position (such as 212) for locating in securing the head disc assembly while awaiting installation of the head stack assembly, a robotic assembly (such as 214) the robotic assembly includes an end effector assembly (such as 232) supported by a vertical slide assembly (such as 234), which is in turn supported by a horizontal slide assembly (such as 236) that attaches to a main plate (such as 208). A measurement assembly made up of a communications interface electronics assembly (such as 246) electronically communicating with a radial displacement potentiometer (such as 248), a linear variable differential transformer (such as 250), and a load cell (such as 252). The robotic assembly picks and places the head stack assembly into the head disc and the measurement assembly collects and communicates process position and force parameters to the computer for use by the computer in calculating distance and force

data. The active installation software program directs and controls enactment of process steps followed by the head stack installation tool by directing the computer to execute installation software program steps based on the position and force data calculated by the computer.

5 It is clear that the present invention is well adapted to attain the ends and advantages mentioned as well as those inherent therein. While a presently preferred embodiment of the invention has been described for purposes of the disclosure, it will be understood that numerous changes can be made which will readily suggest themselves to those skilled in the art. Such changes are encompassed within the
10 spirit of the invention disclosed and as defined in the appended claims.

11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
2206
2207
2208
2209
2

What is claimed is:

1. A method for installing a head stack assembly into a basedeck assembly to form a head disc assembly of a disc drive, comprising steps of:
 - (a) directing a robotic arm to pick and place the head stack assembly into the basedeck assembly;
 - (b) determining compliance of mechanical resistance encountered as the head stack assembly engages the basedeck in relation to installation force magnitude and rate of change of installation force magnitude, over time and position;
 - (c) seating the head stack assembly onto the basedeck assembly forming the head disc assembly, upon determining mechanical resistance and slope compliance; and
 - (d) releasing the head disc assembly from the head stack installation station.
2. The method of claim 1 in which steps (a) through (e) are executed and controlled by an installation software program having installation steps stored on a recordable medium.
3. The method of claim 2 in which the directing step (a) comprises:
 - (a1) compelling a central processing unit of a computer communicating with a head stack installation tool to read a volatile memory until both a head stack present signal and a basedeck present signal are read and reporting presence of the head stack assembly and the basedeck assembly to the installation software program;
 - (a2) acquiring and reporting a head stack assembly serial number and a head disc assembly serial number to the installation software program;
 - (a3) querying a head stack assembly data base for physical characteristics of the head stack assembly and a head disc assembly data base for physical characteristics of the head disc assembly; and
 - (a4) comparing the compatibility between the physical characteristics of the head disc assembly and the physical characteristics of the head stack

assembly.

4. The method of claim 3 wherein the physical characteristics of the head disc assembly and the physical characteristics of the head stack assembly are compatible, and in which the directing step (a) further comprises:

- (a5) reading position data of a horizontal slide and a vertical slide;
- (a6) directing alignment of an end effector assembly adjacent the head stack assembly based on the horizontal slide and the vertical slide position data;
- (a7) enjoining radial displacement of radially disposed positionable gripper sections and lineal movement of a pair of opposing positionable flex connector grippers to engage a beveled pick and place member and a flex connector body of the head stack assembly;
- (a8) measuring the radial displacement of the radially disposed positionable gripper sections with a potentiometer.

5. The method of claim 4 wherein the measurement of radial displacement of the radially disposed positionable gripper sections is consistent with the radially disposed positionable gripper sections engaging the beveled pick and place member of the head stack assembly, and in which the directing step (a) further comprises:

- (a9) commanding removal of the head stack assembly from a nesting position of the head stack installation tool; and
- (a10) directing alignment of the end effector assembly adjacent a head stack assembly post of the basedeck assembly.

6. The method of claim 2 in which the determining step (b) comprises:

- (b1) enjoining engagement of a tolerance ring supported by a head stack assembly post of the basedeck assembly;
- (b2) dispatching the robotic assembly to commence pressing the head stack assembly onto the tolerance ring;
- (b3) compelling a linear variable differential transformer to measure the

distance traveled by the head stack assembly relative to the head stack assembly post and a load cell to measure an amount of mechanical resistance imparted on the head stack assembly; and
 (b4) calculating the mechanical resistance encountered by the head stack assembly engaging the basedeck and the dynamic slope by dividing the difference in the measured distance travel between two points along the installation path into the difference in mechanical resistance encountered by the head stack assembly between the same two points during the same period of time.

7. The method of claim 6 wherein the installation force magnitude is a dynamic force threshold F derived from a relation ($F = f(p) \pm (x)$), where $f(p)$ is a profile of force as a function of position and x is a scalar value, the rate of change of installation force magnitude is a dynamic slope V determined by a slope derived from a relation $V = (f_n - f_{n-1}) / (p_n - p_{n-1})$ at time $(t_{n-1}$ and $t_n)$, where f_n represents the mechanical resistance occurring at a point in time t_n while at a position of engagement p_n and f_{n-1} represents the mechanical resistance occurring at a preceding point in time t_{n-1} while at a preceding position of engagement p_{n-1} , and wherein the mechanical resistance encountered by the head stack assembly engaging the basedeck complies with the dynamic force threshold F and the dynamic slope V remaining compliant with predetermined values, in which the seating step (c) comprises:

- (c1) continuing pressing the head stack assembly onto the tolerance ring monitoring the mechanical resistance remaining compliant and the slope exceeding a maximum predetermined value; and
- (c2) seating the head stack assembly adjacent a base deck of the base deck assembly forming the head disc assembly.

8. The method of claim of claim 2 in which the releasing step (d) comprises:

- (d1) verifying a radial displacement of radially disposed positionable gripper sections with a potentiometer confirming disengagement of the

radially disposed positionable gripper sections from the head stack assembly;

(d2) retracting the robotic assembly from communication with the head disc assembly; and

(d3) releasing the head disc assembly from the head stack installation tool.

9. The method of claim 3 wherein the computer further communicating with a display and wherein the physical characteristics of the head disc assembly and the physical characteristics of the head stack assembly are incompatible, the directing step (a) further comprises:

(a5a) displaying the occurrence of the incompatibility between the head stack assembly and the head disc assembly on the display; and

(a6a) aborting the installation process.

10. The method of claim 4 wherein the computer further communicating with a display and wherein the measurement of radial displacement of the radially disposed positionable gripper sections is inconsistent with the radially disposed positionable gripper sections engaging the beveled pick and place member of the head stack assembly, the measuring step (a) further comprises:

(a9a) directing the end effector assembly to move the radially disposed positionable gripper sections and the pair of opposing positionable flex connector grippers to disengage the beveled pick and place member and the flex connector body of the head stack assembly;

(a10a) measuring the radial displacement of the radially disposed positionable gripper sections with the potentiometer to confirm the radial displacement of the radially disposed positionable gripper sections as consistent with disengagement from the beveled pick and place member;

(a11a) commanding the robotic assembly to retract the end effector assembly from a nesting position;

(a12a) displaying the occurrence of the inconsistency between the

measurement of radial displacement of the radially disposed positionable gripper sections and engagement of the beveled pick and place member of the head stack assembly by the radially disposed positionable gripper sections on the display; and

(a13a) aborting the installation process.

11. The method of claim 10 wherein the installation force magnitude is a dynamic force threshold F derived from a relation ($F = f(p) \pm (x)$), where $f(p)$ is a profile of force as a function of position and x is a scalar value, the rate of change of installation force magnitude is a dynamic slope V determined by a slope derived from a relation $V = (f_n - f_{n-1})/(p_n - p_{n-1})$ at time $(t_{n-1}$ and $t_n)$, where f_n represents the mechanical resistance occurring at a point in time t_n while at a position of engagement p_n and f_{n-1} represents the mechanical resistance occurring at a preceding point in time t_{n-1} while at a preceding position of engagement p_{n-1} and wherein the mechanical resistance encountered by the head stack assembly engaging the basedeck is in non-compliance with the dynamic force threshold F and the dynamic slope V remaining compliant with predetermined values, in which the seating step (c) comprises:

(c1a) directing the robotic assembly to apply a tensile force on the head stack assembly to disengage the head stack assembly from the tolerance ring;

(c2a) compelling the robotic assembly to remove the head stack assembly from the head disc assembly and retract the end effector assembly from the basedeck assembly;

(c3a) reading position data of the horizontal slide and the vertical slide;

(c4a) dispatching the robotic assembly to align of the head stack assembly adjacent the nesting position;

(c5a) enjoining the end effector assembly to disengage the radially disposed positionable gripper sections from the beveled pick and place member of the head stack assembly;

(c6a) measuring the radial displacement of the radially disposed positionable gripper sections with the potentiometer;

(c7a) reading the measured displacement of the radially disposed positionable gripper sections to confirm disengagement of the radially disposed positionable gripper sections with the beveled pick and place member of the head stack assembly;

(c8a) commanding the robotic assembly to retract the end effector assembly from the nesting position;

(c9a) displaying the occurrence of the noncompliance of force to distance ratio with the predetermined values on the display; and

(c10a) aborting the installation process.

12. The method of claim 10 wherein the rate of change of installation force magnitude is a dynamic slope V determined by a slope derived from a relation $V = (f_n - f_{n-1}) / (p_n - p_{n-1})$ at time $(t_{n-1}$ and $t_n)$, where f_n represents the mechanical resistance occurring at a point in time t_n while at a position of engagement p_n and f_{n-1} represents the mechanical resistance occurring at a preceding point in time t_{n-1} while at a preceding position of engagement p_{n-1} , and wherein the dynamic slope V determined by the equation $V = (f_n - f_{n-1}) / (p_n - p_{n-1})$ lapses compliance with predetermined values, the seating step (c) further comprises:

(c1b) directing the robotic assembly to apply a tensile force on the head stack assembly to disengage the head stack assembly from the tolerance ring;

(c2b) compelling the robotic assembly to remove the head stack assembly from the head disc assembly and retract the end effector assembly from the basedeck assembly;

(c3b) reading position data of the horizontal slide and the vertical slide;

(c4b) dispatching the robotic assembly to align of the head stack assembly adjacent the nesting position;

(c5b) enjoining the end effector assembly to disengage the radially disposed positionable gripper sections from the beveled pick and place member of the head stack assembly;

(c6b) measuring the radial displacement of the radially disposed positionable gripper sections with the potentiometer;

- (c7b) reading the measured displacement of the radially disposed positionable gripper sections to confirm disengagement of the radially disposed positionable gripper sections with the beveled pick and place member of the head stack assembly;
- (c8b) commanding the robotic assembly to retract the end effector assembly from the nesting position;
- (c9b) displaying the occurrence of the noncompliance of force to distance ratio with the predetermined values on the display; and
- (c10b) aborting the installation process.

An installation software program having installation software program steps stored on recordable media directing and controlling a sequence of head stack installation process steps executed by a head stack assembly installation station installing a head stack assembly into a basedeck assembly forming a head disc assembly of a disc drive by steps comprising:

13. The method of claim 1 wherein the installation force magnitude is a dynamic force threshold F derived from a relation $(F = f(p) \pm (x))$, where $f(p)$ is a profile of force as a function of position and x is a scalar value.

14. The method of claim 1 wherein the rate of change of installation force magnitude is a dynamic slope V determined by a slope derived from a relation $V = (f_n - f_{n-1}) / (p_n - p_{n-1})$ at time $(t_{n-1}$ and $t_n)$, where f_n represents the mechanical resistance occurring at a point in time t_n while at a position of engagement p_n and f_{n-1} represents the mechanical resistance occurring at a preceding point in time t_{n-1} while at a preceding position of engagement p_{n-1} .

15. The method of claim 13 wherein the rate of change of installation force magnitude is a dynamic slope V determined by a slope derived from a relation $V = (f_n - f_{n-1}) / (p_n - p_{n-1})$ at time $(t_{n-1}$ and $t_n)$, where f_n represents the mechanical resistance occurring at a point in time t_n while at a position of engagement p_n and f_{n-1}

r represents the mechanical resistance occurring at a preceding point in time t_{n-1} while at a preceding position of engagement p_{n-1} .

16. The method of claim 15, in which the directing step (a) comprises:

- (a1i) reading position data of a horizontal slide and a vertical slide;
- (a2i) directing alignment of an end effector assembly adjacent the head stack assembly based on the horizontal slide and the vertical slide position data;
- (a3i) enjoining radial displacement of radially disposed positionable gripper sections and lineal movement of a pair of opposing positionable flex connector grippers to engage a beveled pick and place member and a flex connector body of the head stack assembly;

17. The method of claim 16 in which the directing step (a) further comprises:

- (a4i) removing of the head stack assembly from a nesting position of the head stack installation tool; and
- (a5i) aligning of the end effector assembly adjacent a head stack assembly post of the basedeck assembly.

18. The method of claim 17 in which the determining step (b) comprises:

- (b1i) engaging a tolerance ring supported by a head stack assembly post of the basedeck assembly;
- (b2i) pressing the head stack assembly onto the tolerance ring using the robotic assembly;
- (b3i) measuring the distance traveled by the head stack assembly relative to the head stack assembly post and a load cell to measure an amount of mechanical resistance imparted on the head stack assembly; and
- (b4i) calculating the mechanical resistance encountered by the head stack assembly engaging the basedeck and the dynamic slope by dividing the difference in the measured distance travel between two points

along the installation path into the difference in mechanical resistance encountered by the head stack assembly between the same two points during the same period of time.

5

19. The method of claim 18 wherein the mechanical resistance encountered by the head stack assembly engaging the basedeck complies with the dynamic force threshold F and the dynamic slope V remaining compliant with predetermined values, in which the seating step (c) comprises:

10

- (c1) continuing pressing the head stack assembly onto the tolerance ring monitoring the mechanical resistance remaining compliant and the slope exceeding a maximum predetermined value; and
- (c2) seating the head stack assembly adjacent a base deck of the base deck assembly forming the head disc assembly.

20. A disc drive comprising:
 a head disc assembly with a head stack assembly; and
 means for installing the head stack assembly into the head disc assembly.

1. A disc drive comprising:
 a head disc assembly with a head stack assembly; and
 means for installing the head stack assembly into the head disc assembly.

COMPUTER DIRECTED HEAD STACK ASSEMBLY INSTALLATION SYSTEM

Abstract of the Disclosure

5

10

15

The present invention provides a computer directed head stack assembly installation system with an installation software stored on recordable media directing the controlling a sequence of head stack installation assembly steps executed by a robotic assembly to pick and place a head stack assembly into a basedeck. The installation software program monitors compliance of the placement operation regarding mechanical resistance encountered by the head stack assembly engaging the basedeck compared to a dynamic force threshold F determined by the equation $[F = (f(p) \pm x)]$ and against the dynamic slope V determined by the equation $[V = (f_n - f_{n-1})/(p_n - p_{n-1})]$. Upon successful installation of the head stack assembly into the basedeck forming the head disc assembly, the head disc assembly is released from the head stack assembly installation station.

1/10




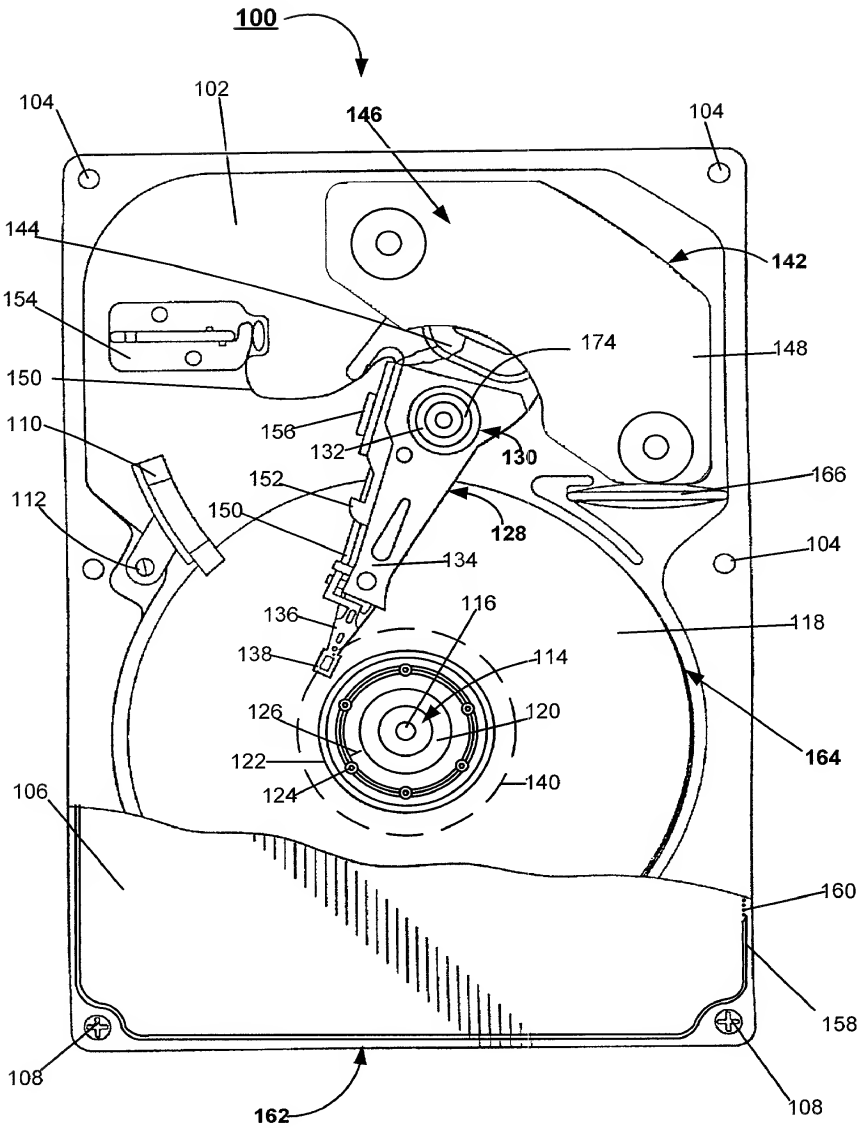


FIG. 1

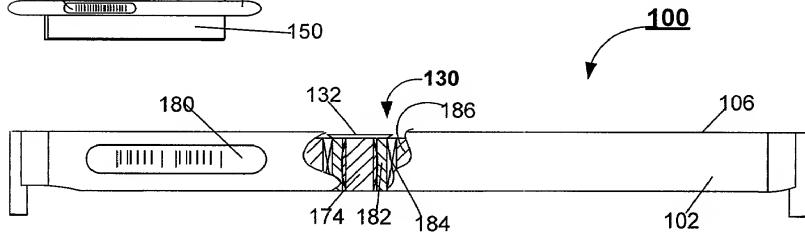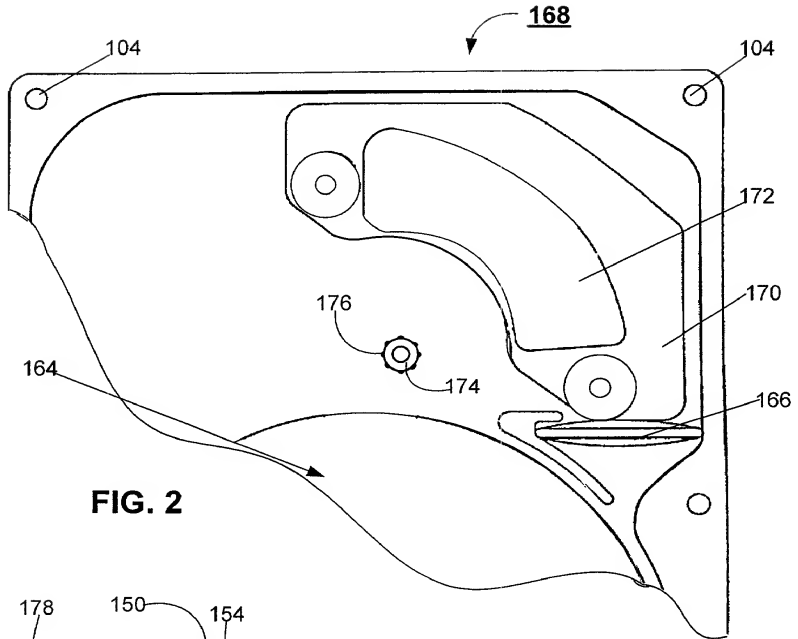

3/10

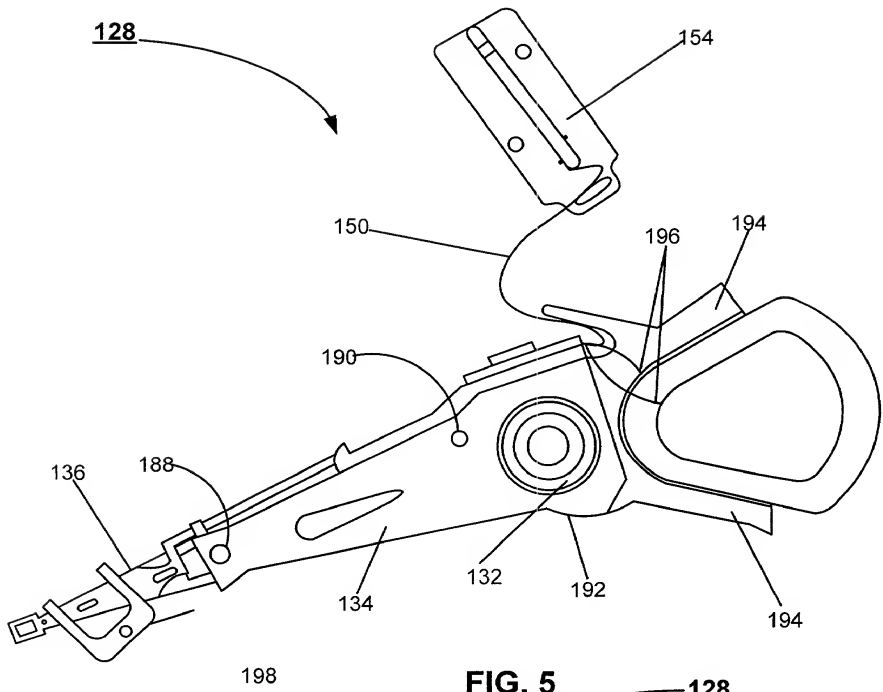


FIG. 5

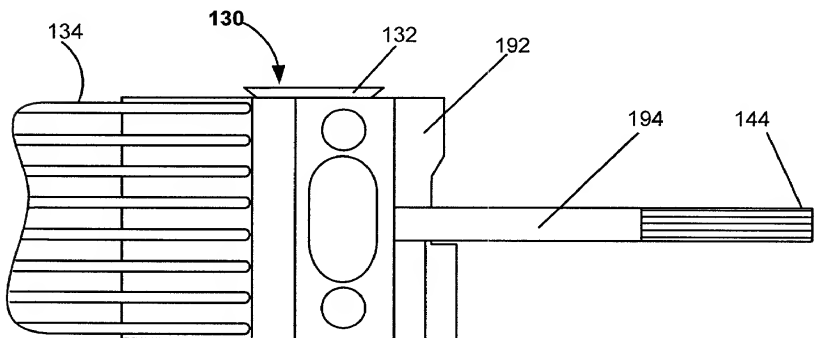
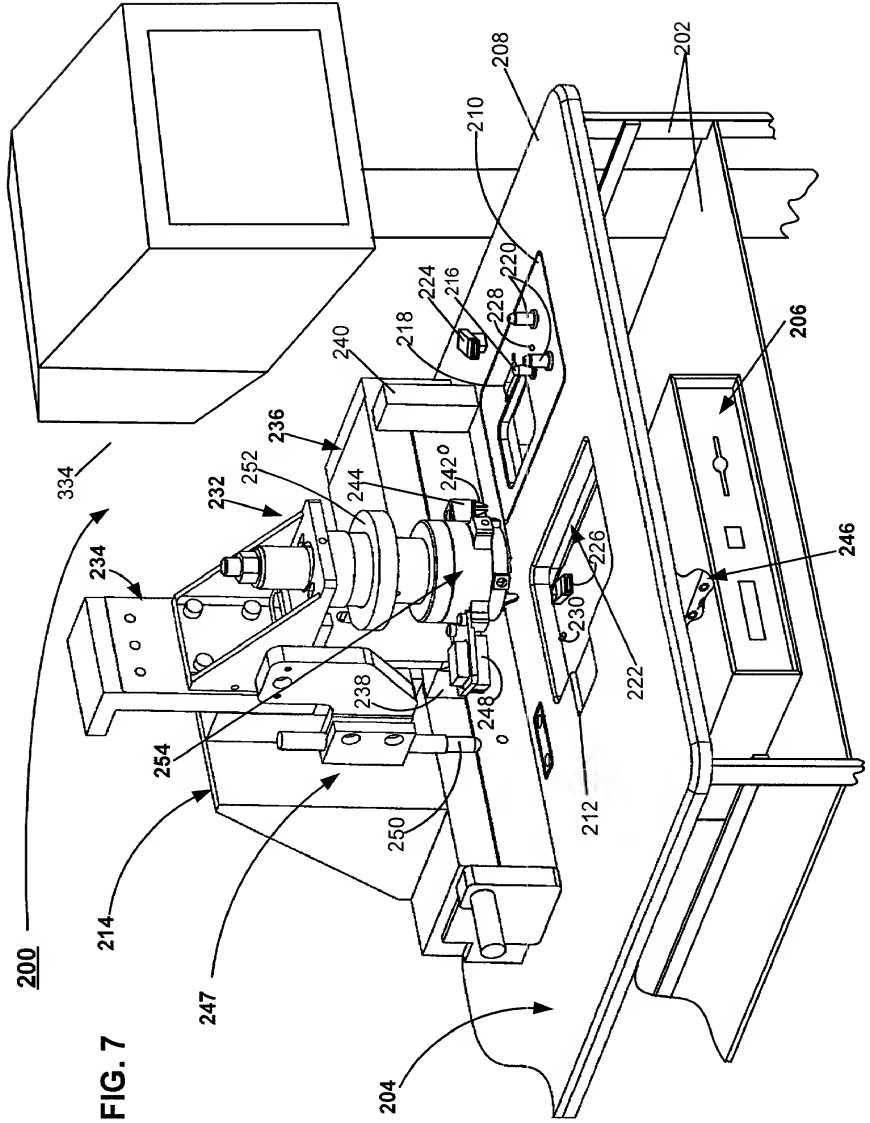


FIG. 6



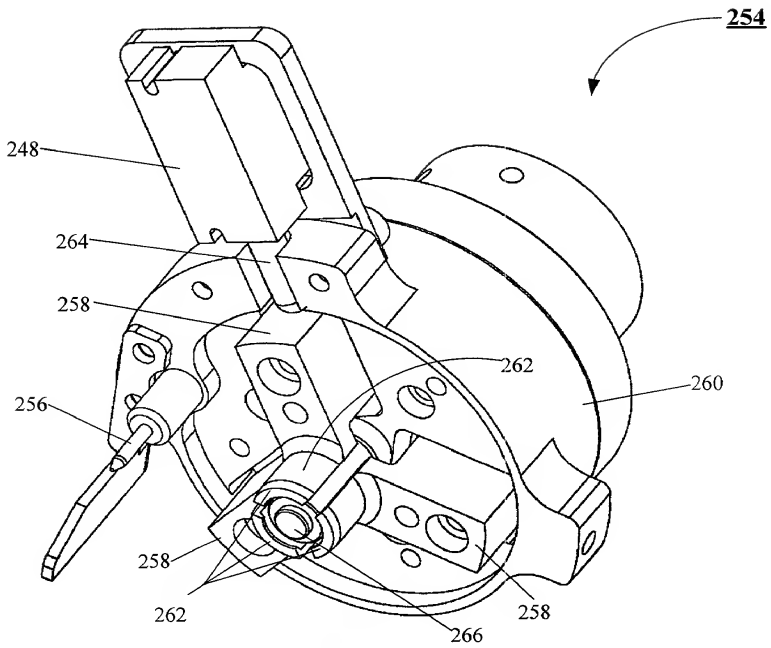


FIG. 8

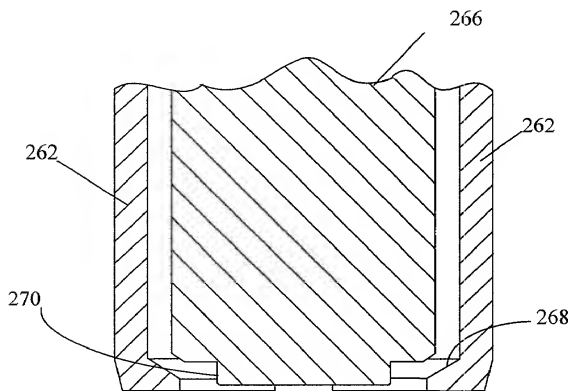


FIG. 9

6/10

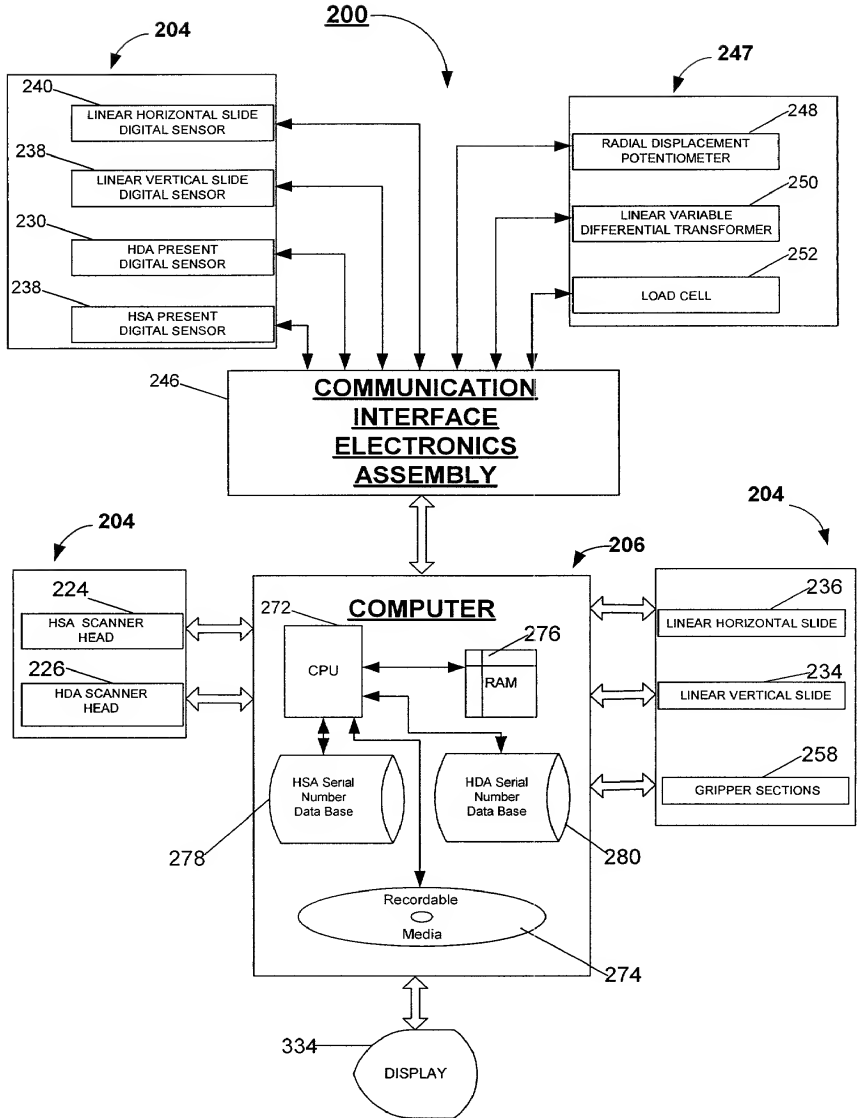


FIG. 10

7/10

300

MAIN PROCESS Decision Flow

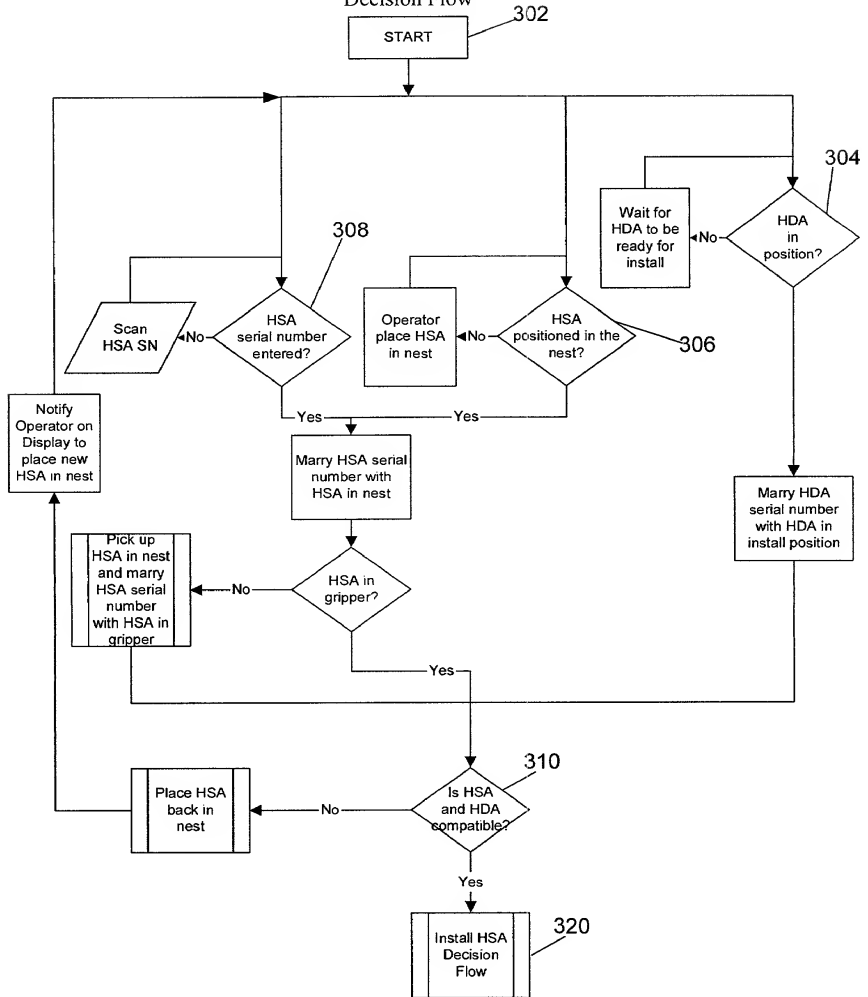


FIG. 11

INSTALL HSA Decision Flow

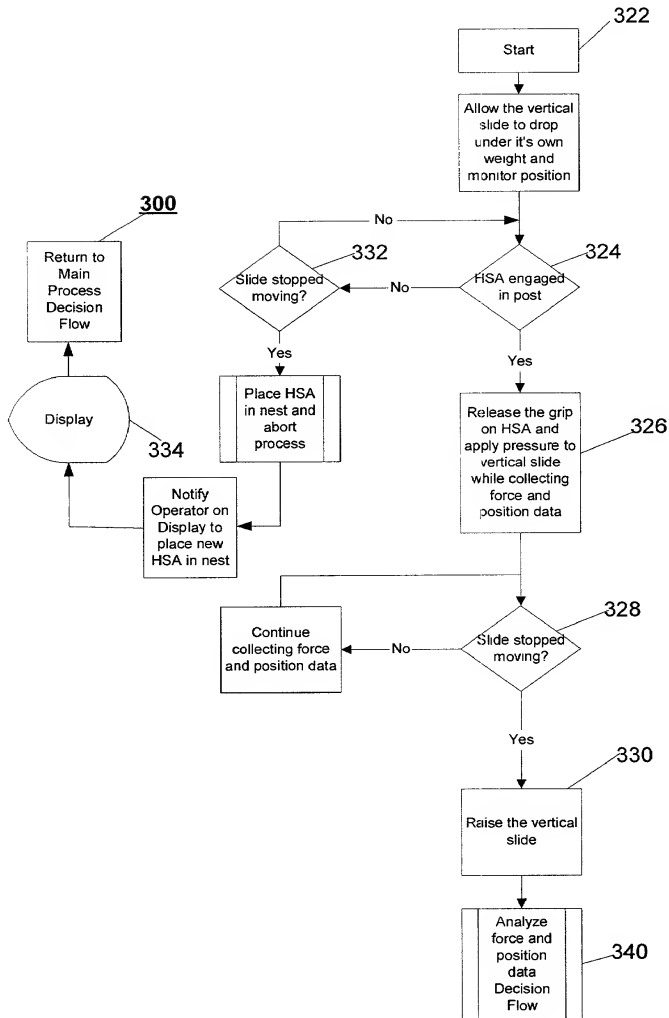


FIG. 12

9/10

Analyze Force and Position Data - Decision Flow

340

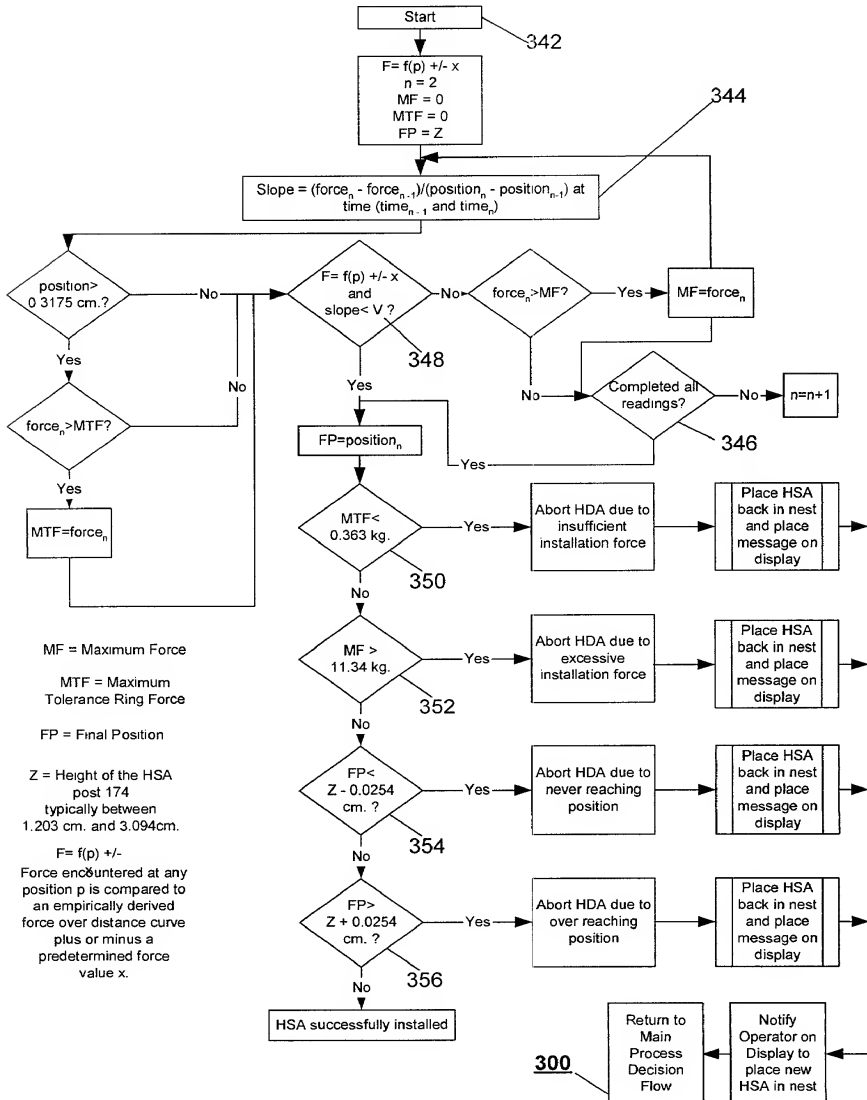


FIG. 13

10/10

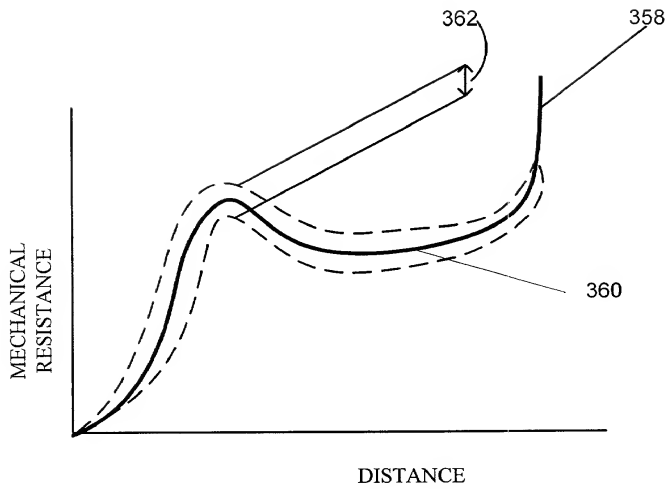


FIG. 14

Docket No. 23124

DECLARATION FOR PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled **COMPUTER DIRECTED HEAD STACK ASSEMBLY INSTALLATION SYSTEM**, the specification of which is attached hereto unless the following box is checked:

_____ was filed on _____ as United States Application Number or PCT International Application Number _____ and was amended on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, § 119(a)-(d) of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed.

Prior Foreign Application(s)

Priority Claimed

(Number) (Country) (Day/Month/Year Filed) Yes No

I hereby claim the benefit under Title 35, United States Code, § 119(e) of any United States provisional application(s) listed below.

60/150,138 August 20, 1999
(Application Number) (Filing Date)

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by

the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application.

(Application Number) (Filing Date) (Status - patented,pending, abandoned)

(Application Number) (Filing Date) (Status - patented,pending, abandoned)

Address all telephone calls to **Bill D. McCarthy** at telephone number **(405) 235-7700** or facsimile number **(405) 239-6651**.

Address all Correspondence to:

Bill D. McCarthy
CROWE & DUNLEVY
1800 Mid-America Tower
20 N. Broadway
Oklahoma City, Oklahoma 73102-8273.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole or first inventor (given name, family name)

Russell P. Slife

Inventor's signature *Russell P. Slife* Date: 8-17-2000

Residence **Oklahoma City, Oklahoma 73132**

Citizenship **United States of America**

Post Office Address **7609 N. Ann Arbor, Oklahoma City, Oklahoma 73132**

Full name of second inventor (given name, family name)

James R. Jenkins

Inventor's signature  Date: 8-17-00

Residence **Yukon, Oklahoma 73099**

Citizenship **United States of America**

Post Office Address **13948 S.W. 39th, Yukon, Oklahoma 73099**

Full name of third inventor (given name, family name)

Roger A. Jessen

Inventor's signature  Date: 8-17-00


Residence **Norman, Oklahoma 73071**

Citizenship **United States of America**

Post Office Address **2939 Willow Creek Drive, Norman, Oklahoma 73071**

Full name of fourth inventor (given name, family name)

Ronald D. Fowler

Inventor's signature  Date: 8-17-00

Residence **Yukon, Oklahoma 73099**

Citizenship **United States of America**

Post Office Address **11085 Folkstone Drive, Yukon, Oklahoma 73099**

Express Mail Receipt No. EK887660828US
Deposited on August 18, 2000

PATENT
DKT. 23124

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

First Named Inventor:	Russell P. Slife, et al.
Serial No.:	Not Yet Assigned
Filed:	August 18, 2000
Docket:	23124

**POWER OF ATTORNEY BY ASSIGNEE OF ENTIRE INTEREST
(REVOCATION OF PRIOR POWERS)**

As assignee of record of the entire interest of the above identified application,

REVOCATION OF PRIOR POWERS OF ATTORNEY

all powers of attorney previously given are hereby revoked and

NEW POWER OF ATTORNEY

the following practitioners/patent agent are hereby appointed to prosecute and transact all business in the Patent and Trademark Office connected therewith

Shawn B. Dempster, Registration No. 34,321	Edward P. Heller, III, Registration No. 29,075
Raghunath S. Minisandram, Registration No. 38,683	Jonathan E. Olson, Registration No. 41,231
Leland D. Schultz, Registration No. 30,322	Cecilia A. (Peggy) Walsh, Registration No. 45,659
Derek J. Berger, Registration No. 45,401	

And members of the firm of Crowe & Dunlevy

Bill D. McCarthy, Registration No. 26,772
Randall K. McCarthy, Registration No. 39,297
Daniel P. Dooley, Registration No. 46,369

CHANGE OF ATTORNEY'S/AGENT'S ADDRESS IN APPLICATION

Crowe & Dunlevy
1800 Mid-America Tower
20 North Broadway
Oklahoma City, OK 73102-8273
Telephone No.: (405) 235-7700
Fax No.: (405) 239-6651

STATEMENT UNDER 37 CFR 3.73 (b)

Seagate Technology LLC states that it is the Assignee of Entire Interest in the patent application/patent identified above by virtue of an Assignment from the inventor(s) of the patent application/patent identified above. A copy of the Assignment is attached and/or was recorded in the Patent and Trademark Office at Reel , Frame . The undersigned (whose title is supplied below) is empowered to sign this statement on behalf of the Assignee.

Respectfully submitted,

SEAGATE TECHNOLOGY LLC
(Assignee of Entire Interest)

18 August 2000
Date

Shawn B. Dempster
Shawn B. Dempster, Reg. No. 34,321
Senior Director of Intellectual Property, Product
and Technology Development
SEAGATE TECHNOLOGY LLC
Intellectual Property Dept. - SHK2LG
1280 Disc Drive
Shakopee, MN 55379-1863
(952) 402-2517 (telephone)
(952) 402-2657 (facsimile)